

AK SERIES 3 QUICK SHIP

WHEN YOU NEED COOL FAST!



Amerikooler Quick Ship Program

Quality, Speed, Convenience, Reliability. The **AK Series-3 Quick Ship** is the #1 choice when you need cool fast! With quotes in 24 hours, premium quality accessories, & the best lead times in the industry, you will never be left waiting. Stay ahead of the curve and top of any project to keep your business running smoothly.

STANDARDIZED QUICK SHIP WALK-IN

Available with self-contained & remote refrigeration systems for indoor or outdoor applications, or simply the box unit with no refrigeration. AK Series 3 is available in 9 sizes, with a standard accessories package included.

Standard Sizes

- 6'x6', 6'x8', 6'x10', 6'x12'
- 8'x8', 8'x10', 8'x12'
- 10'x10', 10'x12'

Standard Features

- 4 Standard height options available with and without floor:
 - 7' 2 1/4" • 7' 7" • 8' 2 1/2" • 8' 7"
- Your choice of a single 30" or 36" clear door opening (76" High), centered on any side
- Top mount self-contained units, indoors/outdoor 35°F, -10°F
- Remote systems, outdoor 35°F, 0°F, -10°F
- All refrigeration with mounted components, 208-230/1/60

WARRANTIES

Amerikooler stands by the quality of our products and materials, which is why we also offer some of the best warranties in the industry.

- 50 Year DUPONT Thermal Warranty
- 15 Year Panel Limited Warranty
- *5 Year Doors/Floors Limited Warranty
- *5 Year Compressor Limited Warranty
- *1 Year Limited Panel Labor Warranty
- *1 Year Original Parts Warranty
- Refrigeration system components will be covered per original equipment manufacturer's warranty terms and conditions.



INDOOR

OUTDOOR

ORDER TODAY!
1.800.627.5665



SPECIFICATIONS

- 4" thick AK-XPS insulation with R-Values of R-29 for coolers and R-32 for freezers
- Acrylume® coated corrosion resistant stucco embossed Galvalume on all interior and exterior surfaces
- Smooth stainless steel floor finish rated at 600 lbs/sq.ft. of uniformly distributed load - for foot traffic only
- Choice of single 30"W x 76"H or 36"W x 76"H flush mounted door centered on any side
- 2 Performer™ lift-off adjustable super cam-rise spring assisted hinges
- Deadbolt keyed handle latch
- Interior safety lock releaser handle
- Spring actuated door closer
- Digital LED thermometer with on/off pilot light switch
- Vapor-proof LED light fixture centered on interior door jamb
- Freezer doors come with mounted pre-wired PRV and heated relief vent
- Floorless Walk-Ins are supplied with NSF vinyl screed
- Outdoor Walk-In accessories include: rain roof membrane, exterior floor angles and door hood

Terms: Orders received after 12 AM will be set up as orders for the next business day. New customers placing their first order require 48 hours for processing with credit card payment. Shipping lead-times are subject to receipt of approval signed drawings, credit approval and standard terms and conditions. Specifications are subject to change without notice due to our continuous production improvements.

CODE COMPLIANCE CERTIFICATES



EASY TO DO BUSINESS WITH SINCE 1985

V5-02.15.24

AK SERIES 3 QUICK SHIP

NO CHANGES. NO EDITS. GUARANTEED



Amerikooler Quick Ship Program

STANDARD SPECS

- 4" Thick AK-XPS4 insulation
- R-29 for coolers or R-32 for freezers
- Single 76" x 30" or 76" x 36" flush mounted centered door
- 50 Year DUPONT Thermal Warranty
- 15 Year Panel Limited Warranty
- 5 Year Doors/Floors Limited Warranty
- 5 Year Compressor Limited Warranty
- 1 Year Limited Panel Labor Warranty
- 1 Year Original Parts Warranty

STANDARD FEATURES

- Interior and exterior paneling available in Acrylume® coated corrosion resistant stucco embossed Galvalume
- Smooth aluminum interior floor rated at 600 lb/sq.ft. of uniformly distributed load
- Floor-less Walk-Ins are supplied with NSF vinyl screed
- Walk-in cooler door electrical 115/1/60, 1.0 amp.
- Total shipping weight: ≈ 1043 lbs. (2 pallets).

STANDARD ACCESSORIES

- Safeguard® deadbolt keyed, padlock capable, pull handle latch + Interior safety lock release handle
- 2 Performer™ lift-off adjustable super cam-rise spring assisted hinges + Spring actuated door closer
- Digital LED thermometer with on/off pilot light switch
- Vapor-proof LED light fixture centered on interior door jamb
- Pre-wired PRV narrow jamb heated pressure relief vent on freezer doors

With Floor:

- 7' 2 1/4" Exterior | 6' 6 1/4" Interior
- 7' 7" Exterior | 6' 11" Interior
- 8' 2 1/2" Exterior | 7' 6 1/2" Interior
- 8' 7" Exterior | 7' 11" Interior

With No Floor:

- 7' 2 1/4" Exterior | 6' 10 1/4" Interior
- 7' 7" Exterior | 7' 3" Interior
- 8' 2 1/2" Exterior | 7' 10 1/2" Interior
- 8' 7" Exterior | 8' 3" Interior

6"x6"



6"x8"



6"x10"



6"x12"



8"x8"



8"x10"




8"x12"



10"x10"



10"x12"

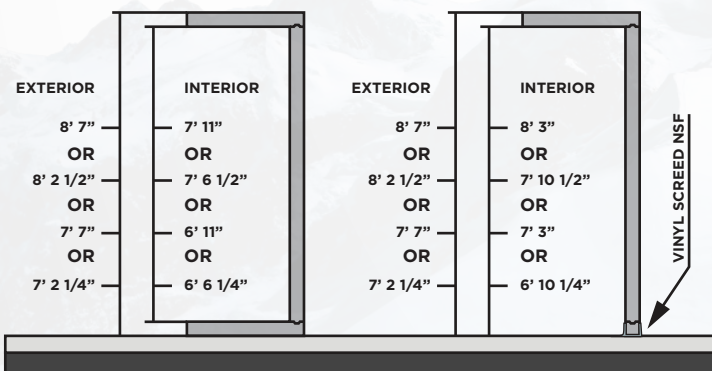

SIDE VIEW WITH FLOOR (RECOMMENDED FOR FREEZERS)

SIDE VIEW WITH NO FLOOR (COOLER ONLY)

EASY TO DO BUSINESS WITH SINCE 1985

V5-02.15.24